

LTF 225

As a synonym for security, the LTF and LTFE range ensure reliable low temperature freezing and high temperature uniformity. Digital display, alarms, contact for remote alarm and castors are some of the standard features.




LTF SERIES

- Single compressor
- Low energy consumption
- Low noise level
- 100% HCFC/CFC free
- Key lock
- Castors
- Basket

ALL STANDARD FEATURES

- Digital display
- Visual and acoustic alarm
- Adjustable high/low temperature alarm
- Contact for remote alarm
- Probe failure alarm

- 60 °C

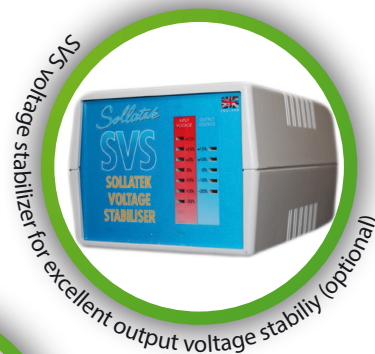

SVS voltage stabilizer for excellent output voltage stability (optional)



Racks and boxes (optional)

Single compressor



Low energy consumption



Low noise level



High temperature uniformity



MODEL	LTF 225
Item code	DAI 0126
Dimensions exterior WxDxH (mm)	720x695x885
Capacity (L)	133
Temperature range (°C)	-60 / -30
Power supply (V)	230
Frequency (Hz)	50/60

ARCTIKO

The art of simplicity®

Technical specifications

Item code	DAI 0126
Dimensions exterior WxDxH (mm)	720x695x885
Capacity (L)	133
Dimensions interior WxDxH (mm)	560x440x635
Insulation (mm)	80
Temperature range (°C)	- 60 / - 30
Max. ambient temperature (°C)	25
Power supply (V)	230
Frequency (Hz)	50/60
Power consumption (KWH/24H)	4,2
Current (A)	3
Weight (KG)	55
Shipping weight (KG)	62
Shipping weight with wooden packaging (KG)	85
Shipping dimensions WxDxH (mm)	800x730x1085
Shipping dimensions with wooden packaging WxDxH (mm)	810x760x1090
No. of compressors	1
Visual / acoustic alarm	Yes
Power failure alarm	No
Adjustable high/low temperature alarm	Yes
Open door alarm	No
Probe failure alarm	Yes
Alarm display as text - not codes	No
Contact for remote alarm	Yes
Prepared for GSM alarm module	Yes
Approx. hrs of battery back up for alarms and temperature display in the event of power cut	No
Porthole for installation of PT100/CO ₂ back up	Yes
Digital display	Yes
Data logger	No
RS 232 interface	No
RS 485 interface	No
USB up/down load	No
Defrost	Manual
Castors	Yes
Chart recorder	Optional
Shelves (pcs)	No
Baskets (pcs)	1
Sub lids / doors (pcs)	No
Lighting	No
Lock	Yes
Inner liner material	Varnished steel
Cabinet material	Varnished steel
Colour (exterior)	White
Refrigerant	HC


Optional



1 The GSM alarm module sends a SMS message to one or several coded telephone numbers in case the temperature exceeds a fixed range.



2 SVS voltage stabilizers for excellent output voltage stability in case the voltage rises or drops.



3 Chart recorder for documentation of the temperature condition over a certain period of time.



CO₂CARE



www.arctiko.com

www.co2care.eu